


A1s

RIM BOARD w/ SQUASH BLOCKS

Use double squash blocks
as specified: squash blocks
must be cut 1/16" taller
than I-Joist. 2x4 minimum

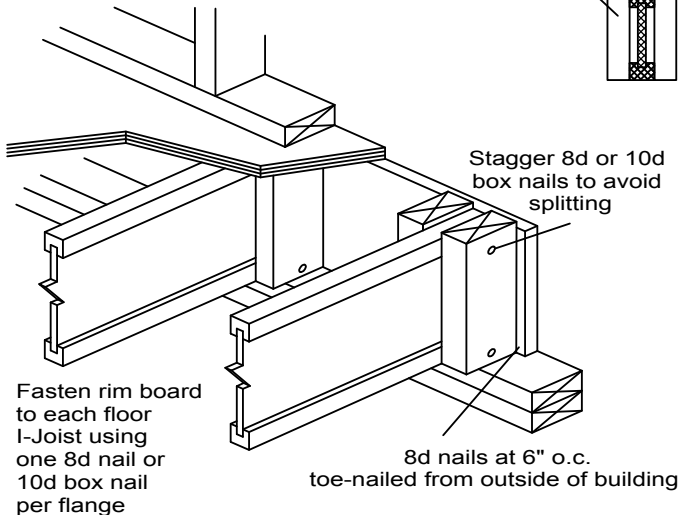

Stagger 8d or 10d
box nails to avoid
splitting

Fasten rim board
to each floor
I-Joist using
one 8d nail or
10d box nail
per flange

8d nails at 6" o.c.
toe-nailed from outside of building