



## E9 Ledger Blocking Under Wall Load

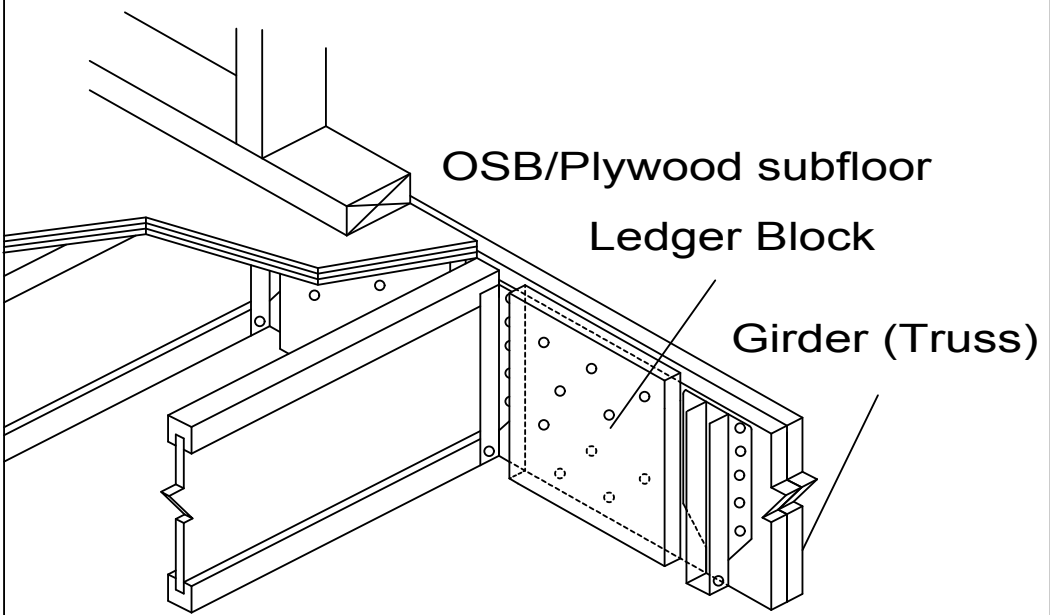

Verify capacity and fastening requirements of hangers and connectors

### Ledger Block:

- 1" (min) LP SolidStart Rim Board, LSL or LVL, or 2x lumber (SPF or better)
- Cut to fit between hangers.
- Install with top of block at or  $1/16"$  above top of I-Joists
- Nail block to Girder (bottom chord of truss).

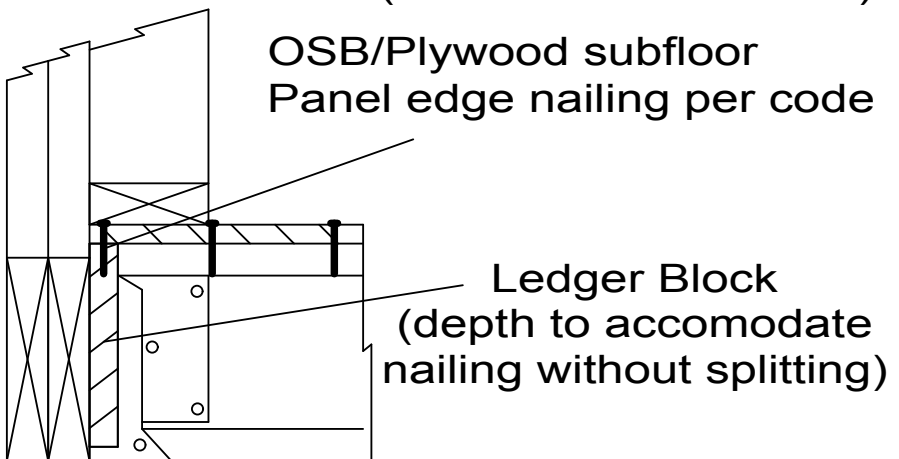

### Connection:

- Nail ledger blocks to girder with 10d (3"x 0.120") or larger nails.
- The required number of nails per block provided by Design Professional.