


TOUCH-UP INSTRUCTIONS: LP ELEMENTS™ PERFORMANCE FENCING

INCLUDED IN KIT:

- 1 pint paint matched to picket color
- Stir stick
- Slobproof! Paint Pen™ for touch-up
- Slobproof™ filling syringe
- Roller and tray

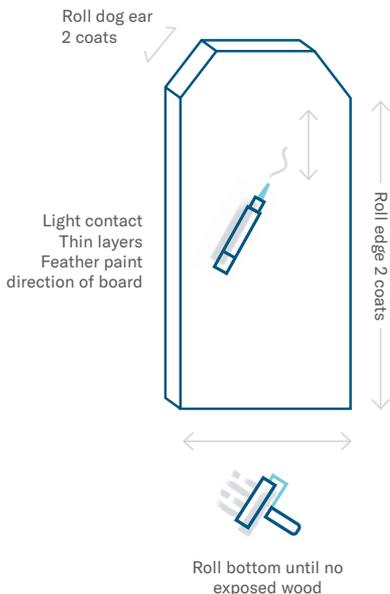

BOARD FACE TOUCH-UP:

- 1 -** Thoroughly mix paint with provided stir stick for 2 minutes prior to any use.
- 2 -** Use filling syringe, take paint from paint can and fill Slobproof pen.
- 3 -** Snap pen top onto the pen body.
- 4 -** Rotate pen filling knob to apply paint to brush.
- 5 -** Feather paint onto board front and back where necessary; do not rub or otherwise smear paint. Use the brush in the direction of the wood grain and paint brush marks. Apply multiple thin layers until desired darkness is reached.

See slobproof.com for additional details.
Apply paint only when temperature is 55°F or above.



Learn more at LPCorp.com/Fence

TOUCH-UP INSTRUCTIONS: LP ELEMENTS™ PERFORMANCE FENCING

LARGE AREA TOUCH-UP, SUCH AS CUT BOTTOMS OR EDGES:

- 1** - Thoroughly mix paint with provided stir for 2 minutes prior to any use.
- 2** - Pour a small amount of paint into supplied roller tray.
- 3** - Apply minimal amount of paint to roller and remove any excess.
- 4** - Paint large cut areas with the roller. Apply minimum 2 coats to any cut surfaces.

Apply paint only when temperature is 55°F or above.

CLEANUP:

- 1** - For Slobproof™ pen, rinse brush with water, replace cap and retain for future use.
- 2** - For roller, dispose of roller, pour remaining paint into can and seal can tightly and retain for future use.



Learn more at [LPCorp.com/Fence](https://www.lpcorp.com/fence)