

**LP<sup>®</sup> SmartSide<sup>®</sup> Strand Substrate  
Treated-Engineered-Wood Lap, Panel, and Vertical Siding  
Louisiana-Pacific Corporation**

**PR-N124**

Revised March 16, 2018

Product:

LP<sup>®</sup> SmartSide<sup>®</sup> Strand Substrate Treated-Engineered-Wood Lap, Panel, and Vertical Siding  
Louisiana-Pacific Corporation, 414 Union Street, Suite 2000, Nashville, TN 37219  
(800) 450-6106  
[www.lpcorp.com](http://www.lpcorp.com)

1. Basis of the product report:

- 2018, 2015, 2012 and 2009 International Building Code: Section 104.11 Alternative materials
- 2018, 2015, 2012 and 2009 International Residential Code: Section R104.11 Alternative materials
- ANSI/AWC SDPWS-2015 Special Design Provisions for Wind and Seismic
- ASCE 7-16, ASCE 7-10, and ASCE 7-05 Minimum Design Loads for Buildings and Other Structures
- APA PRP-108 Performance Standards and Qualification Policy for Structural-Use Panels
- NES Evaluation Protocol for Determination of Flood-Resistance Properties of Building Elements
- APA Reports R&D 87Q-1, T87Q-45, T91Q-11, T91Q-20, T97Q-4, T97Q-10, T98Q-13, T98Q-17, T99Q-23, T2008Q-12, T2008P-73, T2008P-74, T2009Q-54, T2011Q-59, T2012P-22, T2015Q-38, T2015Q-39, T2017P-03, and T2018P-05, and other qualification data.

2. Product description:

Louisiana-Pacific Corporation (LP<sup>®</sup>) SmartSide<sup>®</sup> Strand Substrate Treated-Engineered-Wood Lap, Panel, and Vertical Siding is overlaid with a resin treated paper and is available with either a smooth or embossed surface texture. The siding is treated with Zinc Borate for decay and insect resistance. The efficacy of the preservative treatment of the LP SmartSide siding is outside the scope of this report and the APA certification program. All edges are factory sealed with a primer.

LP SmartSide lap siding is available in 3/8 and 7/16 Performance Categories, in nominal widths of 5, 6, 7, 8, 9-1/2, and 12 inches and in lengths up to 16 feet. The lap siding may be installed horizontally or vertically.

LP SmartSide panel siding is available in 3/8, 7/16 and 19/32 Performance Categories, 4-foot width and in lengths of 8, 9, and 10 feet. The 3/8 Performance Category panels are available without grooves or with grooves spaced 8 inches on center. The 7/16 and 19/32 Performance Category panels are available without grooves or with grooves spaced either 4 or 8 inches on center. Minimum thicknesses at the groove and shiplap are documented in the plant Quality Manual.

LP SmartSide Vertical Siding is a narrow width panel siding and is available in 3/8 Performance Category, nominal width of 16 inches, and in 16 foot lengths. The vertical siding can only be installed vertically.

3. Design properties:

Allowable racking shear values for LP SmartSide Strand Substrate panel siding are listed in Table 1. For 3/8 Performance Category panels nailed at shiplap edges, use 5/16

Performance Category shear values. For 7/16 and 19/32 Performance Category panel sidings nailed at shiplap edges, use 3/8 Performance Category shear values. Design wind loads for LP SmartSide Strand Substrate lap and panel siding are listed in Tables 2 and 3, respectively. Design wind loads for LP SmartSide Strand Substrate lap siding when installed over the facer of structural insulated panels (SIPs) are listed in Table 4. Design wind loads for LP SmartSide Strand Substrate Vertical Siding and lap siding applied vertically are listed in Table 5.

4. Product installation:

LP SmartSide Strand Substrate Treated-Engineered-Wood Lap, Panel, and Vertical Siding shall be installed in accordance with recommendations provided by the manufacturer ([www.lpcorp.com/products/siding/lp-smartside-trim-siding/](http://www.lpcorp.com/products/siding/lp-smartside-trim-siding/)) and APA *Engineered Wood Construction Guide*, Form E30 ([www.apawood.org/resource-library](http://www.apawood.org/resource-library)), as applicable. The maximum span shall be in accordance with the Span Rating shown in the trademark. The LP SmartSide Strand Substrate lap siding shall be permitted to be installed over the facer of structural insulated panels (SIPs) in accordance with Table 4.

LP SmartSide lap siding, when installed vertically, shall be installed over a minimum 7/16 Performance Category wood structural panel sheathing meeting DOC PS1 or DOC PS2 requirements, and shall be covered by a batten at the siding joint or shall be overlapped with another vertical lap siding in accordance with the recommendations provided by the manufacturer, as shown in Figures 1 through 4. Lap siding installed vertically can only span one floor plate-to-plate. Each vertical application shall not span beyond one floor to ceiling distance, or one floor to top of gable distance.

LP SmartSide Vertical Siding shall be installed over a minimum 7/16 Performance Category wood structural sheathing meeting DOC PS1 or DOC PS2 requirements, and shall be covered by a batten at the panel joint in accordance with the recommendations provided by the manufacturer, as shown in Figures 2, 5, and 6. Vertical Siding can only span one floor plate-to-plate. Each vertical application shall not span beyond one floor to ceiling distance, or one floor to top of gable distance.

5. Fire-resistant construction:

Wood structural panels that are not fire-retardant-treated have been shown to meet a Class III (or C) category for flame spread. Unless otherwise specified, fire-resistant construction shall be in accordance with the recommendations in APA *Fire-Rated Systems*, Form W305 (see link above).

6. Flood resistance evaluation:

Selected properties critical to flood resistance of 3/8 and 7/16 Performance Category panel siding, including uniform loads, concentrated static loads, concentrated hard body and soft body impact loads, fastener performance, wall racking resistance, edge thickness swell, linear expansion, hygroscopicity, exterior bond performance and large panel and small specimen bending properties were evaluated at a 16 o.c. Span Rating in accordance with *NES Evaluation Protocol for Determination of Flood-Resistance Properties of Building Elements*. Test results in the dry (as-received) condition and after moisture cycling in accordance with the NES protocol were compared to the requirements specified in ICC Evaluation Service (ICC-ES) *Acceptance Criteria for Treated-Engineered-Wood Siding* (AC321).

7. Limitations:

- a) LP SmartSide Strand Substrate Treated-Engineered-Wood Lap, Panel, and Vertical Siding used outdoors must be finished in accordance with recommendations provided by the manufacturer (see link above) and APA *Engineered Wood Construction Guide*, Form E30 (see link above).

- b) The efficacy of the preservative treatment of the LP SmartSide siding is outside the scope of this report and the APA certification program.
  - c) LP SmartSide Strand Substrate Treated-Engineered-Wood panel siding is flood resistant on the properties listed in Section 6. This evaluation applies to 3/8 and 7/16 Performance Category panel siding at a 16 o.c. Span Rating.
  - d) LP SmartSide Strand Substrate Treated-Engineered-Wood Lap and Panel Siding is produced at Louisiana-Pacific Corporation facilities at Hayward, WI, Newberry, MI, Tomahawk, WI, Two Harbors, MN, and Swan Valley, Minitonas, MB, and LP SmartSide Strand Substrate Treated-Engineered-Wood Vertical Siding is produced at Louisiana-Pacific Corporation facility at Tomahawk, WI, under a quality assurance program audited by APA.
  - e) This report is subject to re-examination in one year.
8. Identification:  
LP SmartSide Strand Substrate Treated-Engineered-Wood Lap, Panel, and Vertical Siding described in this report is identified by a label bearing the manufacturer's name (Louisiana-Pacific Corporation) and/or trademark, the APA assigned plant number (357 for the Hayward plant, 416 for the Newberry plant, 435 for the Tomahawk plant, 399 for the Two Harbors plant, or 457 for the Swan Valley plant), the product Performance Category, the Span Rating, the Exposure Rating, the APA logo, the report number PR-N124, and a means of identifying the date of manufacture.

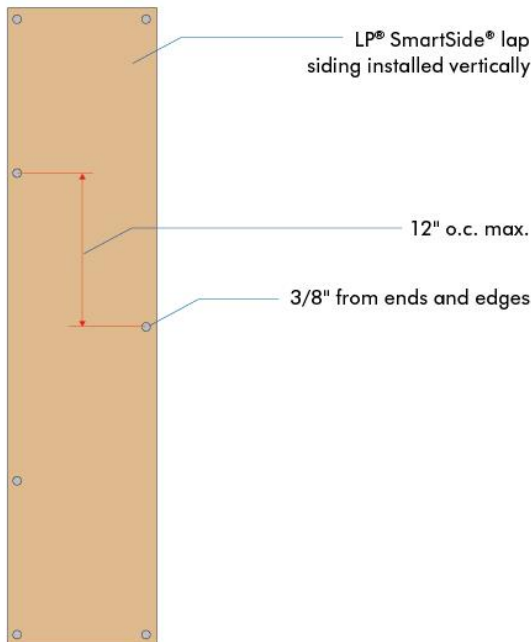


Figure 1. Lap siding installed vertically

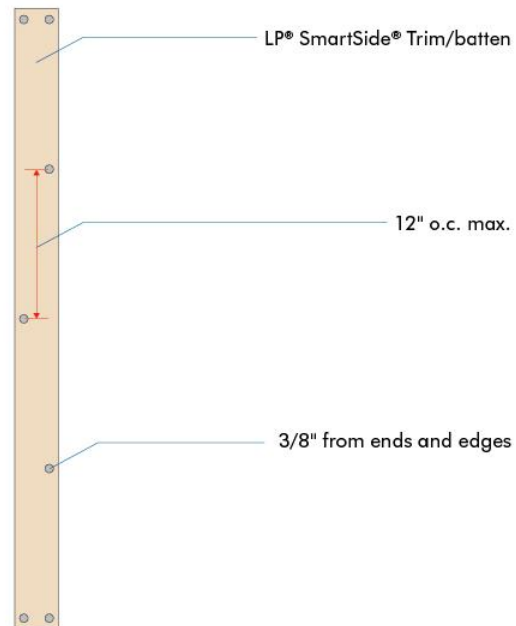


Figure 2. LP SmartSide Trim/Batten

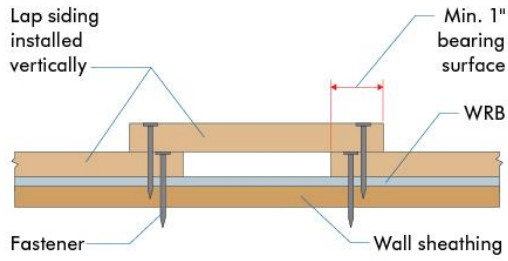


Figure 3. Lap siding attachment detail

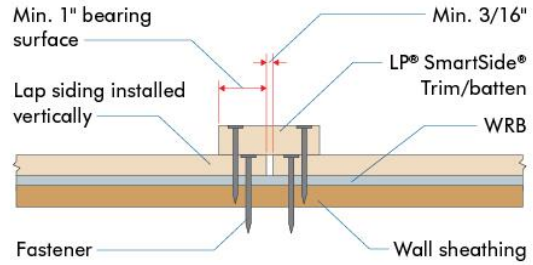


Figure 4. LP® SmartSide® Trim/Batten attachment detail

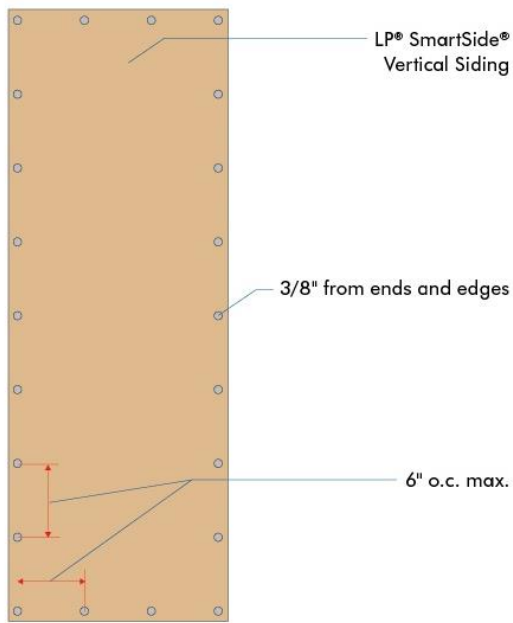


Figure 5. Vertical Siding

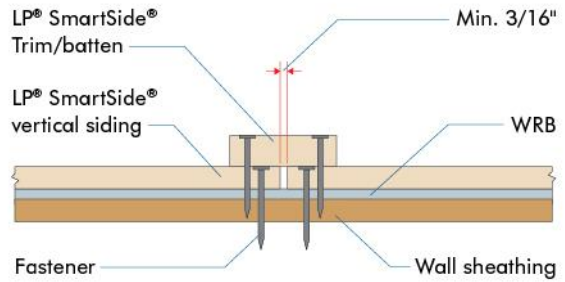


Figure 6. Vertical Siding attachment detail

Table 1. Allowable Racking Shear (plf) for LP SmartSide Strand Substrate Treated-Engineered-Wood Panel Siding Shear Walls with Framing of Douglas-Fir-Larch or Southern Pine for Wind or Seismic Loading<sup>(1,2,3)</sup>

Performance Category	Min. Nail Penetration in Framing (inches)	Panels Applied Directly to Framing					Panels Applied Over Max. 5/8-inch Gypsum Sheathing				
		Nail Size (common or galvanized box) <sup>(7,8)</sup>	Nail Spacing at Panel Edges (inches)				Nail Size (common or galvanized box) <sup>(7,8)</sup>	Nail Spacing at Panel Edges (inches)			
			6	4	3	2 <sup>(4)</sup>		6	4	3	2 <sup>(4)</sup>
5/16 <sup>(5,6)</sup>	1-1/4	6d	180	270	350	450	8d	180	270	350	450
3/8 <sup>(5,6)</sup>			200	300	390	510		200	300	390	510
3/8 <sup>(5,6)</sup>	1-1/2	8d	220	320	410	530	10d	260	380	490 <sup>(4)</sup>	640
7/16 <sup>(5)</sup>			240	350	450	585		260	380	490 <sup>(4)</sup>	640
19/32 <sup>(5)</sup>	1-5/8	10d	340	510	665 <sup>(4)</sup>	870	-	-	-	-	-

For **SI**: 1 inch = 25.4 mm, 1 plf = 14.6 N/m.

- <sup>(1)</sup> For framing of other species: (a) find specific gravity for species of lumber in the National Design Specification for Wood Construction (NDS); (b) find shear value from Table for nails size; (c) multiply value by 0.82 for species with specific gravity greater than or equal to 0.42 but less than 0.49, or 0.65 for species with specific gravity less than 0.42.
- <sup>(2)</sup> All panel edges must be backed with 2-inch nominal or wider framing. Panels must be installed with the long dimension oriented in the vertical direction. Space nails 6 inches o.c. along intermediate framing members for 3/8 and 7/16 Performance Category panels installed on studs spaced 24 inches o.c. For other conditions and panel performance categories, space nails 12 inches o.c. on intermediate supports.
- <sup>(3)</sup> For shear loads of normal or permanent load duration, the values in the Table shall be multiplied by 0.63 or 0.56, respectively.
- <sup>(4)</sup> Framing at panel edges must be 3 inches nominal or wider and nails must be staggered where nails are spaced 2 inches o.c., and where 10d nails having penetration into framing of more than 1-5/8 inches are spaced 3 inches or less, o.c. **Exception:** Unless otherwise required, 2-inch nominal framing may be used where full nailing surface is available and nails are staggered.
- <sup>(5)</sup> Except as noted in Footnote 7, panel thickness at point of nailing at panel edges determines applicable shear values, except that 3/8 Performance Category panels nailed at shiplap edges use 5/16 Performance Category shear values, and 7/16 and 19/32 Performance Category panel sidings nailed at shiplap edges use 3/8 Performance Category shear values.
- <sup>(6)</sup> Shiplap edges must be double-nailed; one nail must be placed in the underlap and a second nail must be placed in the overlap at the nail spacing specified for the applicable shear value.
- <sup>(7)</sup> Fasteners must not be installed in panel siding grooves in the field of the panel siding or when the panel siding grooves occur at cut edges of the panel siding.
- <sup>(8)</sup> Fastener dimensions are as specified in ASTM F 1667.

Table 2a. Lap Siding Installed Horizontally with 0.113" Nails – **Max. Allowable Wind Speed,  $V_{asd}^{(1)}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Siding Width (inches)	Max. Allowable Wind Pressure (psf)	Max. Allowable Wind Speed $V_{asd}^{(3)}$ (mph)		
				Wind Exposure Category		
				B	C	D
3/8	16	5	80	170	150	140
		6	80	170	150	140
		7	80	170	150	140
		8	74	170	145	130
		9.5	61	150	130	120
		12	47	130	110	105
7/16	16	6	80	170	150	140
		7	80	170	150	140
		8	74	170	145	130
		9.5	65	150	130	125
		12	47	130	110	105
	24	6	69	150	140	130
		7	58	150	130	110
		8	49	140	120	110
		9.5	41	125	105	100
		12	31	110	90	85

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) One fastener for each stud located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.113 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 2 inches. **Lap siding is not a bracing material.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 2b. Lap Siding Installed Horizontally with 0.113" Nails – **Max. Ultimate Wind Speed,  $V_{ult}^{(1)}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Siding Width (inches)	Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed $V_{ult}^{(3)}$ (mph)		
				Wind Exposure Category		
				B	C	D
3/8	16	5	133	200 <sup>(4)</sup>	180	180
		6	133	200 <sup>(4)</sup>	180	180
		7	133	200 <sup>(4)</sup>	180	180
		8	123	200 <sup>(4)</sup>	180	160
		9.5	102	200 <sup>(4)</sup>	160	150
		12	79	180	150	140
7/16	16	6	133	200 <sup>(4)</sup>	180	180
		7	133	200 <sup>(4)</sup>	180	180
		8	123	200 <sup>(4)</sup>	180	160
		9.5	102	200 <sup>(4)</sup>	160	150
		12	79	180	150	140
	24	6	115	200 <sup>(4)</sup>	180	160
		7	96	180	160	150
		8	85	180	150	140
		9.5	68	160	140	130
		12	52	140	120	110

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) One fastener for each stud located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.113 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 2 inches. **Lap siding is not a bracing material.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.
- (4) Table R301.2(2) of the 2018 and 2015 IRC is limited to a maximum ultimate design wind speed,  $V_{ult}$ , of 180 mph.

Table 2c. Lap Siding Installed Horizontally with 0.092" Nails – **Max. Allowable Wind Speed,  $V_{asd}^{(1)}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Siding Width (inches)	Max. Allowable Wind Pressure (psf)	Max. Allowable Wind Speed $V_{asd}^{(3)}$ (mph)		
				Wind Exposure Category		
				B	C	D
3/8	16	5	78	170	150	130
		6	63	150	130	125
		7	52	145	120	110
		8	45	130	110	105
		9.5	37	120	100	90
		12	28	105	90	-
7/16	16	6	63	150	130	125
		7	52	145	120	110
		8	45	130	110	105
		9.5	37	120	100	90
		12	28	105	90	-
	24	6	42	130	110	100
		7	35	120	100	90
		8	30	110	90	85
		9.5	25	100	85	-
		12	19	85	-	-

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) One fastener for each stud located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.092 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 1.5 inches. **Lap siding is not a bracing material.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 2d. Lap Siding Installed Horizontally with 0.092" Nails – **Max. Ultimate Wind Speed,  $V_{ult}^{(1)}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Siding Width (inches)	Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed $V_{ult}^{(3)}$ (mph)		
				Wind Exposure Category		
				B	C	D
3/8	16	5	131	200 <sup>(4)</sup>	180	180
		6	104	200 <sup>(4)</sup>	160	160
		7	87	180	160	140
		8	75	160	140	130
		9.5	61	150	130	120
		12	47	140	115	-
7/16	16	6	104	200 <sup>(4)</sup>	160	160
		7	87	180	160	140
		8	75	160	140	130
		9.5	61	150	130	120
		12	47	140	115	-
	24	6	70	160	140	130
		7	58	150	130	120
		8	50	140	120	110
		9.5	41	130	110	-
		12	32	110	-	-

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) One fastener for each stud located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.092 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 1.5 inches. **Lap siding is not a bracing material.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.
- (4) Table R301.2(2) of the 2018 and 2015 IRC is limited to a maximum ultimate design wind speed,  $V_{ult}$ , of 180 mph.

Table 3a. Panel Siding Installed Vertically with 0.113" Nails – **Max. Allowable Wind Speed,  $V_{asd}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Fastener Spacing <sup>(1)</sup> (inches o.c.)		Max. Allowable Wind Pressure (psf)	Max. Allowable Wind Speed $V_{asd}$ <sup>(3)</sup> (mph)		
		Edges	Field		Wind Exposure Category		
					B	C	D
3/8	16	6	12	43	130	110	100
			6	80	170	150	140
	24	6	12	29	105	90	-
			6	58	150	130	110
7/16	16	6	12	43	130	110	100
			6	80	170	150	140
	24	6	12	29	105	90	-
			6	58	150	130	110
19/32	16	6	12	43	130	110	100
			6	80	170	150	140
	24	6	12	29	105	90	-
			6	58	150	130	110

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.113 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 2 inches.
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 3b. Panel Siding Installed Vertically with 0.113" Nails – **Max. Ultimate Wind Speed,  $V_{ult}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Fastener Spacing <sup>(1)</sup> (inches o.c.)		Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed $V_{ult}$ <sup>(3)</sup> (mph)		
		Edges	Field		Wind Exposure Category		
					B	C	D
3/8	16	6	12	72	160	140	130
			6	133	200 <sup>(4)</sup>	180	180
	24	6	12	48	140	115	-
			6	96	180	160	150
7/16	16	6	12	72	160	140	130
			6	133	200 <sup>(4)</sup>	180	180
	24	6	12	48	140	115	-
			6	96	180	160	150
19/32	16	6	12	72	160	140	130
			6	133	200 <sup>(4)</sup>	180	180
	24	6	12	48	140	115	-
			6	96	180	160	150

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.113 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 2 inches
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.
- (4) Table R301.2(2) of the 2015 IRC is limited to a maximum ultimate design wind speed,  $V_{ult}$ , of 180 mph.



Table 3c. Panel Siding Installed Vertically with 0.092" Nails – **Max. Allowable Wind Speed,  $V_{asd}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Fastener Spacing <sup>(1)</sup> (inches o.c.)		Max. Allowable Wind Pressure	Max. Allowable Wind Speed, $V_{asd}$ <sup>(3)</sup> (mph)		
		Edges	Field		Wind Exposure Category		
					B	C	D
3/8	16	6	12	26	100	85	-
			6	52	145	120	110
	24	6	12	17	85	-	-
			6	35	120	100	90
7/16	16	6	12	26	100	85	-
			6	52	145	120	110
	24	6	12	17	85	-	-
			6	35	120	100	90
19/32	16	6	12	26	100	85	-
			6	52	145	120	110
	24	6	12	17	85	-	-
			6	35	120	100	90

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.092 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 1.5 inches. **Configuration cannot be used for lateral bracing due to nail size.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 3d. Panel Siding Installed Vertically with 0.092" Nails – **Max. Ultimate Wind Speed,  $V_{ult}$**

Performance Category	Max. Stud Spacing <sup>(2)</sup> (inches)	Fastener Spacing <sup>(1)</sup> (inches o.c.)		Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed $V_{ult}$ <sup>(3)</sup> (mph)		
		Edges	Field		Wind Exposure Category		
					B	C	D
3/8	16	6	12	44	130	110	-
			6	87	180	160	140
	24	6	12	29	-	-	-
			6	58	150	130	120
7/16	16	6	12	44	130	110	-
			6	87	180	160	140
	24	6	12	29	-	-	-
			6	58	150	130	120
19/32	16	6	12	44	130	110	-
			6	87	180	160	140
	24	6	12	29	-	-	-
			6	58	150	130	120

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Fasteners shall be a hot dipped galvanized plain (smooth) shank nail, with a minimum shank diameter of 0.092 inch, and long enough to penetrate structural framing or wood structural panels and structural framing a minimum of 1.5 inches. **Configuration cannot be used for lateral bracing due to nail size.**
- (2) Wall studs must have a minimum specific gravity of 0.42.
- (3) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.
- (4) Table R301.2(2) of the 2015 IRC is limited to a maximum ultimate design wind speed,  $V_{ult}$ , of 180 mph.

Table 4a. Lap Siding Installed Horizontally to SIPs<sup>(1)</sup> – **Max. Allowable Wind Speed,  $V_{asd}$** <sup>(2)</sup>

Performance Category	Max. Ring Shank Nail Spacing <sup>(3)</sup> (inches)	Max. Wood Screw Spacing <sup>(4)</sup> (inches)	Siding Width (inches)	Max. Allowable Wind Pressure (psf)	Max. Allowable Wind Speed $V_{asd}$ <sup>(5)</sup> (mph)		
					Wind Exposure Category		
					B	C	D
3/8	8	12	5	80	170	150	140
			6	80	170	150	140
			7	72	170	145	130
			8	63	150	130	125
			9.5	54	145	125	110
7/16	12	16	6	58	150	130	120
			7	50	140	120	110
			8	42	130	110	100
			9.5	36	120	100	90
			12	27	105	85	-

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) The facer of the structural insulated panels (SIPs) shall be 7/16 Performance Category or thicker OSB sheathing meeting DOC PS2 requirements.
- (2) The tabulated values represent the capacity of the LP Lap Siding installed in accordance with the requirements of this Table. **The tabulated wind speed shall not exceed the SIP capacity for wind load resistance.**
- (3) One ring shank fastener located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized ring shank nail, with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural facer panel.
- (4) One #8 wood screw located 3/4 inch from the top edge of the siding may be used. The wood screws must have a minimum shank diameter of 0.164 inch. Length shall be long enough to fully penetrate wood structural facer panel.
- (5) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 4b. Lap Siding Installed Horizontally to SIPs<sup>(1)</sup> – **Max. Ultimate Wind Speed,  $V_{ult}$** <sup>(2)</sup>

Performance Category	Max. Ring Shank Nail Spacing <sup>(3)</sup> (inches)	Max. Wood Screw Spacing <sup>(4)</sup> (inches)	Siding Width (inches)	Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed $V_{ult}$ <sup>(5)</sup> (mph)		
					Wind Exposure Category		
					B	C	D
3/8	8	12	5	133	200 <sup>(6)</sup>	180	180
			6	133	200 <sup>(6)</sup>	180	180
			7	119	200 <sup>(6)</sup>	160	160
			8	105	200 <sup>(6)</sup>	160	160
			9.5	90	180	160	150
			12	67	160	140	120
7/16	12	16	6	97	200 <sup>(6)</sup>	160	150
			7	79	180	150	140
			8	70	160	140	130
			9.5	60	150	130	120
			12	45	130	115	-

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) The facer of the structural insulated panels (SIPs) shall be 7/16 Performance Category or thicker OSB sheathing meeting DOC PS2 requirements.
- (2) The tabulated values represent the capacity of the LP Lap Siding installed in accordance with the requirements of this table. **The tabulated wind speed shall not exceed the SIP capacity for wind load resistance.**
- (3) One ring shank fastener located 3/4 inch from the top edge of the siding. Each successive course of lap siding must overlap a minimum of 1 inch. Fasteners shall be a hot dipped galvanized ring shank nail, with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural facer panel.
- (4) One #8 wood screw located 3/4 inch from the top edge of the siding may be used. The wood screws must have a minimum shank diameter of 0.164 inch. Length shall be long enough to fully penetrate wood structural facer panel.
- (5) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.
- (6) Table R301.2(2) of the 2015 IRC is limited to a maximum ultimate design wind speed,  $V_{ult}$ , of 180 mph.

Table 5a. Vertical Siding or Lap Siding Installed Vertically – **Max. Allowable Wind Speed,  $V_{asd}^{(1)}$**

Perf. Category	Siding Type	Siding Width (inches)	Fastener Edge Spacing (inches o.c.)	Max. Allowable Wind Pressure (psf)	Max. Allowable Wind Speed, $V_{asd}^{(6)}$ (mph)		
					Wind Exposure Category		
					B	C	D
3/8	Vertical Siding	16 <sup>(2)</sup>	6 <sup>(4)</sup>	80	170	150	140
	Lap Siding Installed Vertically	5 <sup>(3)</sup>	12 <sup>(5)</sup>	80	170	150	140
		6 <sup>(3)</sup>		72	170	145	130
		7 <sup>(3)</sup>		62	150	130	120
		8 <sup>(3)</sup>		54	145	125	110
		9.5 <sup>(3)</sup>		46	130	110	105
12 <sup>(3)</sup>	36	120	100	90			
7/16	Lap Siding Installed Vertically	6 <sup>(3)</sup>	12 <sup>(5)</sup>	72	170	145	130
		7 <sup>(3)</sup>		62	150	130	120
		8 <sup>(3)</sup>		54	145	125	110
		9.5 <sup>(3)</sup>		46	130	110	105
		12 <sup>(3)</sup>		36	120	100	90

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Siding shall be installed over 7/16 Performance Category or thicker wood structural panel sheathing meeting DOC PS1 or DOC PS2 requirements.
- (2) Vertical Siding installed in accordance with Figures 2, 5, and 6.
- (3) Lap Siding installed vertically in accordance with Figure 1 through 4.
- (4) Fasteners must be ring shank nails with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural panel wall sheathing. Fasteners must be spaced a maximum of 6 inches o.c. along the siding perimeter in accordance with Figures 5 and 6.
- (5) Fasteners must be ring shank nails with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural panel wall sheathing. Fasteners must be spaced a maximum of 12 inches o.c. along alternating edges of the length of the trim/batten in accordance with Figures 1 and 4.
- (6) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 6 of ASCE 7-05, Section R301.2.1 of the 2009 and 2012 IRC, and Section 1609.1.1 of the 2009 IBC.

Table 5b. Vertical Siding or Lap Siding Installed Vertically - **Max. Ultimate Wind Speed,  $V_{ult}^{(1)}$**

Perf. Category	Siding Type	Siding Width (inches)	Fastener Edge Spacing (inches o.c.)	Max. Ultimate Wind Pressure (psf)	Max. Ultimate Wind Speed, $V_{ult}^{(6)}$ (mph)		
					Wind Exposure Category		
					B	C	D
3/8	Vertical Siding	16 <sup>(2)</sup>	6 <sup>(4)</sup>	133	200	180	180
	Lap Siding Installed Vertically	5 <sup>(3)</sup>	12 <sup>(5)</sup>	133	200	180	180
		6 <sup>(3)</sup>		120	200	180	160
		7 <sup>(3)</sup>		103	200	160	160
		8 <sup>(3)</sup>		90	180	160	150
		9.5 <sup>(3)</sup>		76	160	150	130
		12 <sup>(3)</sup>		60	150	130	120
7/16	Lap Siding Installed Vertically	6 <sup>(3)</sup>	12 <sup>(5)</sup>	120	200	180	160
		7 <sup>(3)</sup>		103	200	160	160
		8 <sup>(3)</sup>		90	180	160	150
		9.5 <sup>(3)</sup>		76	160	150	130
		12 <sup>(3)</sup>		60	150	130	120

For **SI**: 1 inch = 25.4 mm, 1 psf = 47.88 Pa, 1 mph = 0.447 m/s.

- (1) Siding shall be installed over 7/16 Performance Category or thicker wood structural panel sheathing meeting DOC PS1 or DOC PS2 requirements.
- (2) Vertical Siding installed in accordance with Figures 2, 5, and 6.
- (3) Lap Siding installed vertically in accordance with Figure 1 through 4.
- (4) Fasteners must be ring shank nails with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural panel wall sheathing. Fasteners must be spaced a maximum of 6 inches o.c. along the siding perimeter in accordance with Figures 2, 5, and 6.
- (5) Fasteners must be ring shank nails with a minimum shank diameter of 0.092 inch. Length shall be long enough to fully penetrate wood structural panel wall sheathing. Fasteners must be spaced a maximum of 12 inches o.c. along alternating edges of the length of the batten in accordance with Figures 1 and 4.
- (6) Three-second-gust; based on wind pressures acting toward and away from building surfaces, at 30-ft height in Zone 5 with smallest effective area in accordance with Chapter 26 of ASCE 7-16 and ASCE 7-10, Section R301.2.1 of the 2018 and 2015 IRC, and Section 1609.1.1 of the 2018, 2015, and 2012 IBC.

*APA – The Engineered Wood Association* is an approved national standards developer accredited by American National Standards Institute (ANSI). APA publishes ANSI standards and Voluntary Product Standards for wood structural panels and engineered wood products. APA is an accredited certification body under ISO/IEC 17065 by Standards Council of Canada (SCC), an accredited inspection agency under ISO/IEC 17020 by International Code Council (ICC) International Accreditation Service (IAS), and an accredited testing organization under ISO/IEC 17025 by IAS. APA is also an approved Product Certification Agency, Testing Laboratory, Quality Assurance Entity, and Validation Entity by the State of Florida, and an approved testing laboratory by City of Los Angeles.

**APA – THE ENGINEERED WOOD ASSOCIATION  
HEADQUARTERS**

7011 So. 19<sup>th</sup> St. ▪ Tacoma, Washington 98466  
Phone: (253) 565-6600 ▪ Fax: (253) 565-7265 ▪ Internet Address: [www.apawood.org](http://www.apawood.org)

**PRODUCT SUPPORT HELP DESK**  
(253) 620-7400 ▪ *E-mail Address:* [help@apawood.org](mailto:help@apawood.org)

**DISCLAIMER**

APA Product Report® is a trademark of *APA – The Engineered Wood Association*, Tacoma, Washington. The information contained herein is based on the product evaluation in accordance with the references noted in this report. Neither APA, nor its members make any warranty, expressed or implied, or assume any legal liability or responsibility for the use, application of, and/or reference to opinions, findings, conclusions, or recommendations included in this report. Consult your local jurisdiction or design professional to assure compliance with code, construction, and performance requirements. Because APA has no control over quality of workmanship or the conditions under which engineered wood products are used, it cannot accept responsibility for product performance or designs as actually constructed.